

Specifications

TLP Pro 1025M Series and TLS 1025M

Display

Screen type.....	TFT Active matrix Color LCD
Size	10.1" (25.7 cm), measured diagonally
Resolution.....	1280x800 (WXGA)
Pixel density.....	149 PPI
Aspect ratio.....	16:10
Color depth	24 bit, 16.7 million colors
Transparency	8 bit
Brightness.....	420 nits (cd/m²)
Contrast	800:1
Backlight	LED
Viewing angle.....	±85° horizontal, ±85° vertical
Touch screen.....	Capacitive

Memory

RAM	2 GB
Storage	8 GB

Ethernet

Connectors.....	1 female RJ-45 connector
Data rate	10/100/1000Base-T, half/full duplex with autodetect
Protocols.....	DHCP, DNS, HTTP, HTTPS, ICMP, IEEE 802.1x, SFTP, SSH, TCP/IP, UDP/IP
Default settings	Link speed and duplex level: autodetected IP address = 192.168.254.251 Subnet mask = 255.255.255.0 Default gateway = 0.0.0.0 DHCP = off DNS = 127.0.0.1

Software

TLP Pro 1025M	
Configuration software	Global Configurator Plus and Professional, GUI Designer
Programming software	ControlScript Programming
Control apps	Extron Control
Resource management software.....	GlobalViewer Enterprise
Utilities	Toolbelt, Embedded web page
TLS 1025M	
Configuration software	Room Agent

Sensors

Motion sensor	On/off
Light sensor	Auto/manual

Specifications • TLP Pro 1025M Series and TLS 1025M (Continued)

USB

Quantity/type.....	1 high-speed USB 2.0 device
Connectors.....	1 micro-B receptacle
Standards.....	USB 2.0, USB 1.1, USB 1.0 compatible
Max. data rates	Low speed (1.5 Mbps), full speed (12 Mbps), high speed (480 Mbps)

Digital input

Quantity/type.....	1 digital input (configurable)
Connectors.....	(1) 3.5 mm captive screw connector, 2 pole
Digital inputs	
Input voltage range.....	0 to 24 VDC, clamped at +30 VDC
Input impedance	≥10k ohms
Programmable pullup	1k ohms to +5 VDC
Threshold low to high	2.8 VDC
Threshold high to low	2.0 VDC
Pin configuration	1 = Digital input, 1 = Gnd


Audio output

Speaker output.....	2 mono, 89 dB Max. SPL @ 0.1 m
Frequency response	750 Hz to 20 kHz, ±5 dB
Playback format(s)	
Container format.....	WAV (Microsoft RIFF)
Encoding	LPCM (uncompressed)
Bit depth	Unsigned 8-bit Signed 16-bit Signed 24-bit Signed 32-bit
Sampling rate	Up to 192 kHz
Audio channels.....	Mono or stereo

General

Power supply	Not included
Power input requirements.....	Power over Ethernet (PoE 802.3af, class 3)
Power consumption — Power injector (XTP PI 100)	
Device	12.9 watts
Device and power injector	14.7 watts
Auxiliary power output	
USB	5 VDC, 275 mA
Temperature/humidity	Storage: -4 to +140 °F (-20 to +60 °C) / 10% to 90%, noncondensing Operating: +32 to +104 °F (0 to +40 °C) / 10% to 90%, noncondensing
Cooling.....	Convection, vents on back
Thermal dissipation — Power injector (XTP PI 100)	
Device	39.3 BTU/hr
Device and power injector	45.3 BTU/hr
Mounting	Wall, furniture, glass, or rack
Enclosure type	Plastic

Specifications • TLP Pro 1025M Series and TLS 1025M (Continued)

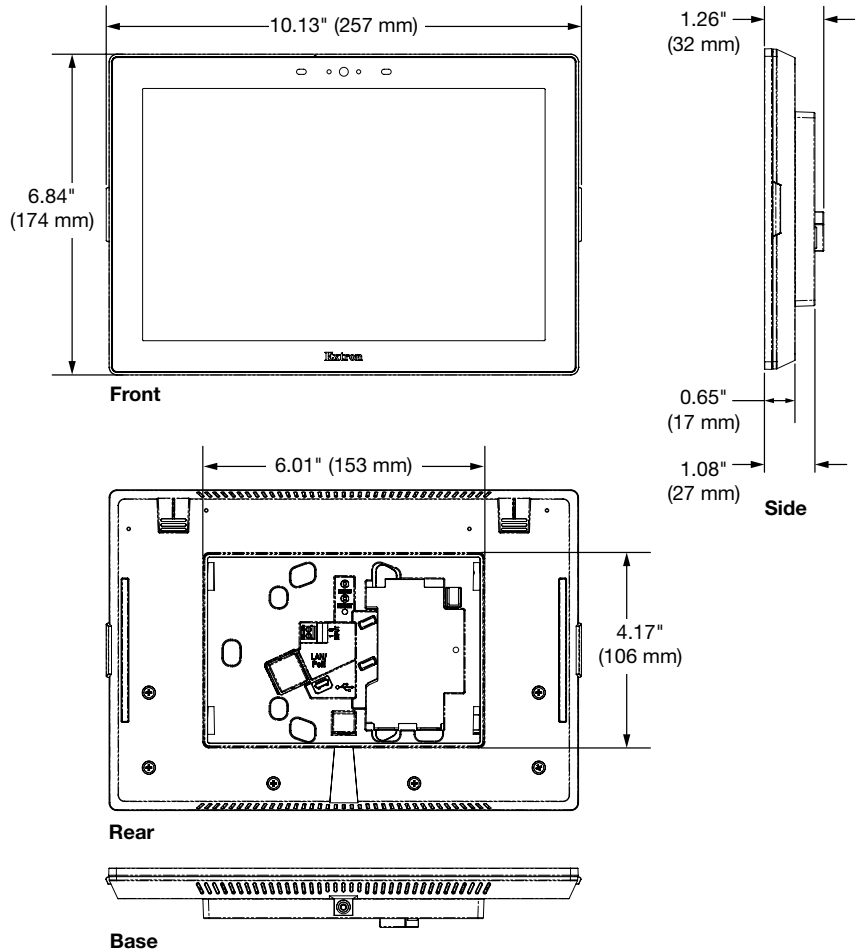

Enclosure dimensions.....	6.84" H x 10.13" W x 1.26" D (174 mm H x 257 mm W x 32 mm D) Touchpanel projects 0.65" (17 mm) from the mounting surface
Product weight.....	2.05 lbs (0.92 kg)
Regulatory compliance	BIS, CE, c-UL, UL, C-Tick, FCC Class A, ICES, KC, VCCI, RoHS, and WEEE.
Product warranty.....	3 years parts and labor; touchpanel display and overlay components are covered for 1 year

NOTES:

- All nominal levels are at $\pm 10\%$.
- Specifications are subject to change without notice.
- Shipping dimensions and weights are available at www.extron.com.

6089-D6